

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/021053 A1

(51) International Patent Classification⁷: **A61L 9/12,**
A01M 1/20

(21) International Application Number:
PCT/CH2004/000527

(22) International Filing Date: 20 August 2004 (20.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0320460.9 2 September 2003 (02.09.2003) GB

(71) Applicant (for all designated States except US): **GIVAUDAN SA** [CH/CH]; Chemin de la Parfumerie 5, CH-1214 Vernier (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BROWN, Colin** [GB/GB]; 135 Binfield Road, Bracknell Berkshire RG42

2BD (GB). **NAISH, Guy Edward** [GB/GB]; 28 Mullein Road, Bicester Oxfordshire OX26 3WB (GB). **GOHIL, Kishen** [GB/GB]; 21 Consfield Av., New Malden Surrey KT3 6HB (GB).


(74) Agent: **MCSTEAL, John, Anthony**; Ueberlandstrasse 138, CH-8600 Duebendorf (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **LIQUID DISSEMINATING DEVICE**

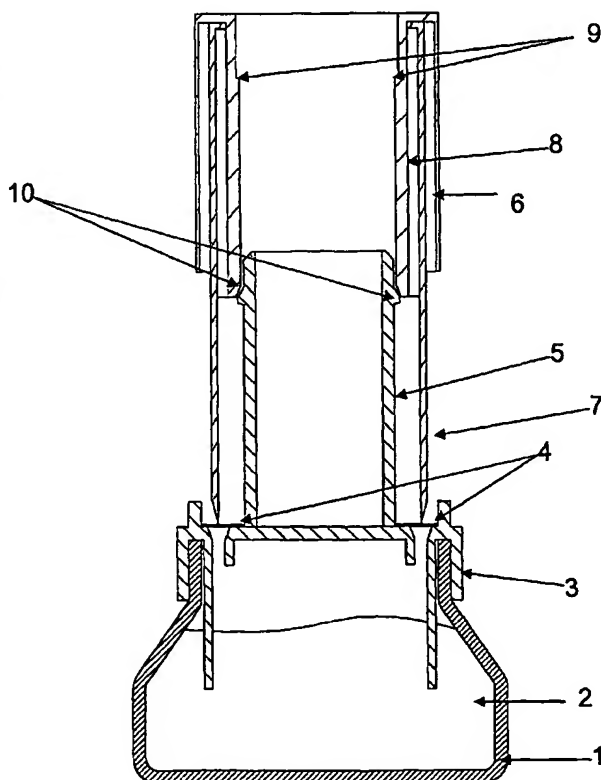

(57) Abstract: An apparatus adapted to disseminate volatile liquid into an atmosphere comprises a reservoir (1) containing volatile liquid and a liquid transfer member (7) that transfers liquid from the reservoir to the atmosphere via an orifice in the reservoir. The reservoir orifice is closed by a puncturable membrane (4), and the transfer member (7) is mounted adjacent to the orifice on the side of the membrane (4) remote from the liquid and adapted such that it can be pushed through the puncturable membrane (4) into, and then held in contact with, the liquid in the reservoir, to permit the flow of the liquid from the reservoir to the atmosphere. The liquid transfer member (7) preferably comprises capillary channels. The apparatus has the advantage of being leakproof in transit.

WO 2005/021053 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

LIQUID DISSEMINATING DEVICE

This invention relates to an apparatus for disseminating a volatile liquid into an atmosphere.

5 Many commercially-available apparatus for the dissemination of volatile liquids, such as fragrances and insecticides, into an atmosphere comprise a reservoir of volatile liquid and, extending therefrom, a liquid transfer member, typically a porous wick. In a more recent development, it has been proposed to replace the wick with an external capillary member, that is, a member bearing external channels of capillary dimensions. Such a member has
10 been described in United States Patent 4,913,350. Such members have the advantage of avoiding the undesirable fractionating effect that occurs particularly with multi-component fragrances, with one component evaporating into the atmosphere before the others. However, apparatus utilising this technology are prone to leakage during transport, and this has been a major factor in the lack of acceptance of this otherwise superior transfer member
15 technology.

It has now been found that this problem can be overcome by a particular design of apparatus. The invention therefore provides an apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir containing volatile liquid
20 and a liquid transfer member that transfers liquid from the reservoir to the atmosphere via an orifice in the reservoir, the reservoir orifice being closed by a puncturable membrane, and the transfer member being mounted adjacent to the orifice on the side of the membrane remote from the liquid and adapted such that it can be pushed through the puncturable membrane into, and then held in contact with, the liquid in the reservoir, to permit the flow
25 of the liquid from the reservoir to the atmosphere.

The reservoir can be any suitable reservoir of any suitable size and material. It has an orifice that may be sealed by a puncturable membrane, which may be any puncturable membrane known to the art, for example metal foil or plastics. The membrane may be across a neck of
30 the reservoir, which comprises the orifice, or it may be one or more membranes in a cap that is attached over the orifice.

The liquid is transferred from the reservoir to the atmosphere by means of a transfer member. In using the word "member" in the singular, the plural is also included, that is, a plurality of such members may be used.

- 5 The transfer member may be any suitable transfer member. It may, for example, be a solid material that is inherently porous, and many such materials having the necessary porosity and rigidity are known to the art. However, it is preferably an external capillary member, that is, a member bearing on its surface a plurality of capillary channels.
- 10 The transfer member is mounted adjacent to the orifice and is adapted to be pushed through the membrane to reach the liquid in the reservoir and convey it to the atmosphere. This can be achieved by any convenient means. One means is to provide the orifice of the reservoir with a neck and the member bearing the transfer member as part of a cap that can be attached to this neck by any convenient means, for example, by screw threads or by a snap
- 15 fitting. In one embodiment, the apparatus is provided as two components, a sealed reservoir and a cap, which can be combined for use. This has two advantages, namely (a) there is no possibility of accidental opening of the reservoir in transport, and (b) the reservoir may be provided as a refill, enabling the neck to be used a number of times.
- 20 There are many possible ways of providing the required transfer member that will be immediately evident to the skilled person. In a preferred embodiment, the transfer member forms part of a cap as hereinabove described, the cap being vented to atmosphere and having suitable fittings to allow attachment to the reservoir in such a position that the transfer member can puncture the membrane, when required. The transfer member itself
- 25 may be located, and slidable, within the cap by any convenient means. It may puncture the membrane by any convenient means, for example by means of points or edges provided on its bottom.

- The transfer member may be of substantial thickness, meaning that, when it is pushed
- 30 through the membrane, most of, or even all, of the membrane is removed. This allows the possibility of leakage, and it is preferred that the transfer means puncture the membrane, leaving it essentially intact and therefore less prone to leakage. This may be achieved by

using a number of relatively narrow, relatively thin transfer members arranged in any suitable way. Thus, in an especially preferred embodiment, the capillary member consists of a number (typically 2-6) of relatively narrow, relatively thin, typically planar members arranged in a circular pattern and held together at their tops by any suitable structure. At the
5 bottom of each transfer member is a point or edge adapted to puncture the membrane. In an especially preferred embodiment, the transfer member comprises a plurality of narrow, thin members bearing external capillaries.

The apparatus is brought into operation by pushing the transfer member through the
10 membrane and into the liquid. Liquid can then flow up the transfer member and be disseminated into the atmosphere. This can be arranged by any convenient means. For example, the transfer member may be located within a flexible outer cap, which, when pushed, will distort, while the rigid transfer member does not and is pushed into puncturing the membrane. In a further embodiment, the transfer member is provided with locking
15 means, such as a snap fitting, that prevents its withdrawal from contact with the liquid. In a further embodiment, the outer cap is provided with longitudinal slots, which, when the cap is pressed to bring the capillary member into contact with the liquid, open to allow release of liquid into the atmosphere.

20 The invention additionally provides a method of providing secure transport of a volatile liquid to be released into an atmosphere, followed by efficient release of that liquid into the atmosphere, comprising the provision of a reservoir of volatile liquid having an orifice closed by a puncturable membrane, and puncturing that membrane by pushing through it at least one liquid transfer member adapted to puncture the membrane, to such an extent that
25 the transfer member comes into liquid-transferring contact with the liquid in the reservoir and maintaining this liquid-transferring contact.

The invention is now further described with reference to the drawings, which depict preferred embodiments and which are not intended to be limiting on the scope of the
30 invention in any way.

Figure 1 is a longitudinal cross-section through an embodiment of the invention, prior to its activation.

Figure 2 is a longitudinal cross-section through the embodiment of Figure 1, showing it in
5 activated position, with detailed inset of a locking mechanism.

A reservoir 1 contains a volatile liquid 2 for dissemination into an atmosphere. To the open neck of this reservoir is fitted a closure 3, that contains four orifices, sealed with foil 4. The closure has an extended neck 5, on which rests a cap 6. From this cap depend four capillary
10 members 7, these being flat members whose surface comprises capillary channels. The four capillary members correspond with the four foil-closed orifices, and the capillary members end adjacent to the foil in points capable of penetrating the foil.

The cap has an inner sleeve 8 that is of the same diameter as the inner diameter of the neck
15 5, enabling one to slide over the other. At the top of the sleeve are indentations 9. These are adapted to mate with matching projections 10 on the neck 5 and hold the cap in place when it is depressed. The material of the neck 5 is sufficiently flexible such that, when the cap 6 is depressed, the sleeve 8 can slide over the projections, until the indentations 9 are reached, at which point the projections spring out, locking the cap in place.

20


Figure 2 shows the cap in its depressed position. The capillary members 7 are pushed through the foils 4 to the liquid 2. The projections 10 in the neck 5 are locked into the indentations 9 in the cap inner sleeve 8. Liquid can flow up the capillary members 7 for evaporation into the atmosphere.

Claims:

1. An apparatus adapted to disseminate volatile liquid into an atmosphere, the apparatus comprising a reservoir containing volatile liquid and a liquid transfer
5 member that transfers liquid from the reservoir to the atmosphere via an orifice in the reservoir, the reservoir orifice being closed by a puncturable membrane, and the transfer member being mounted adjacent to the orifice on the side of the membrane remote from the liquid and adapted such that it can be pushed through the puncturable membrane into, and then held in contact with, the liquid in the reservoir,
10 to permit the flow of the liquid from the reservoir to the atmosphere.
2. An apparatus according to claim 1, in which the liquid transfer member comprises a plurality of relatively narrow, relatively thin transfer members.
- 15 3. An apparatus according to claim 1 or claim 2, in which the liquid transfer member comprises capillary channels.
4. A method of providing secure transport of a volatile liquid to be released into an atmosphere, followed by efficient release of that liquid into the atmosphere,
20 comprising the provision of a reservoir of volatile liquid having an orifice closed by a puncturable membrane, and puncturing that membrane by pushing through it at least one liquid transfer member adapted to puncture the membrane, to such an extent that the transfer member comes into liquid-transferring contact with the liquid in the reservoir and maintaining this liquid-transferring contact.
25
5. A method according to claim 4, in which the reservoir and the transfer member are provided in separate components that are combined when dissemination of the liquid is desired.


1/2

Fig.1

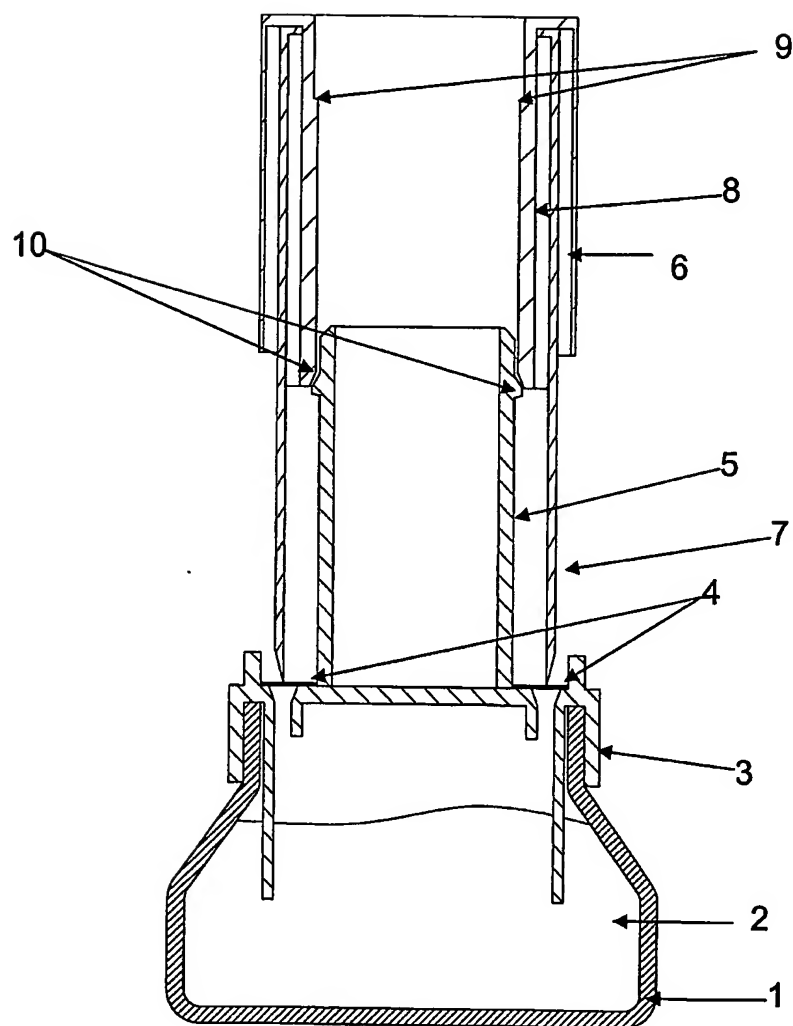

2/2

Fig.2

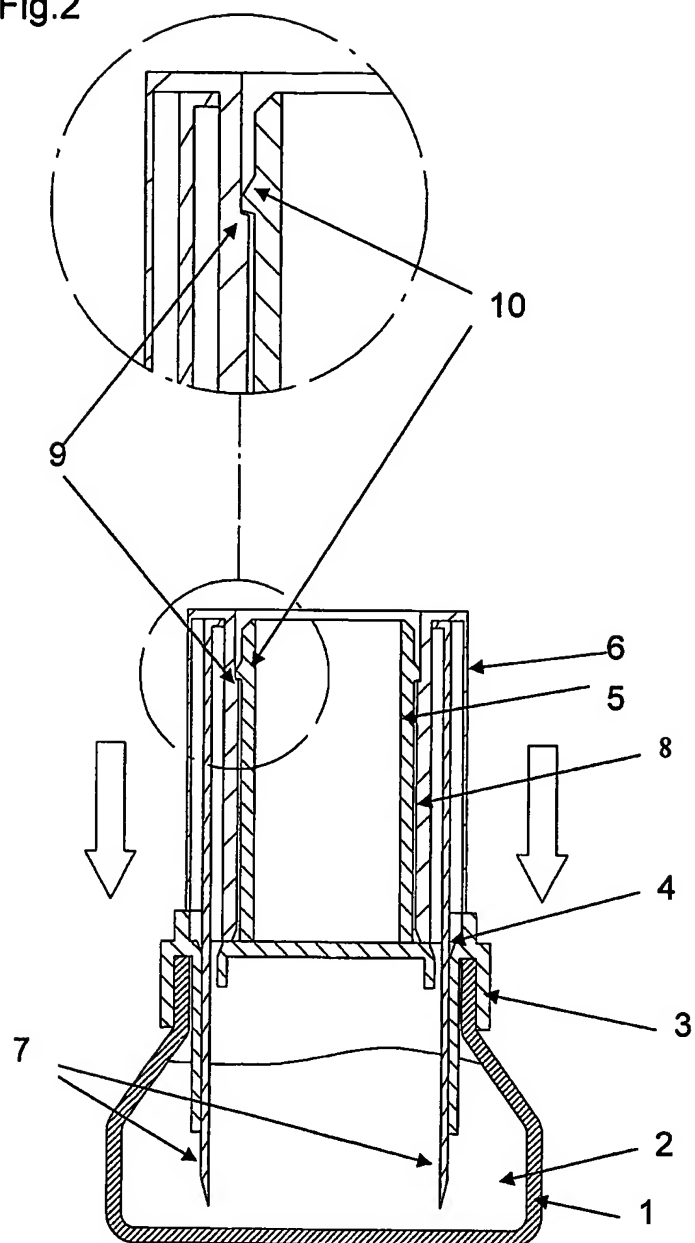

INTERNATIONAL SEARCH REPORT

Int. Application No
 PCT/CH2004/000527

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 A61L9/12 A01M1/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 A61L A01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 995 555 A (WOODRUFF KEITH F) 26 February 1991 (1991-02-26) column 4, line 39 - column 5, line 31 column 7, line 60 - column 8, line 5; figures 3,6a,6b,7,8 -----	1,3-5
X	WO 99/03514 A (JOHNSON & SON INC S C) 28 January 1999 (1999-01-28) the whole document -----	1,3-5
X	EP 0 094 499 A (GLOBOL WERK) 23 November 1983 (1983-11-23) the whole document -----	1,2,4,5
A	GB 2 014 854 A (GLOBOL WERK) 5 September 1979 (1979-09-05) the whole document -----	1,4,5
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the International search

14 October 2004

Date of mailing of the International search report

26/10/2004

Name and mailing address of the ISA
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fac (+31-70) 340-3018

Authorized officer

Marti, P

INTERNATIONAL SEARCH REPORT

International Application No
PC./JH2004/000527

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 768 676 A (KANEKO TOSHIHIKO) 6 September 1988 (1988-09-06) the whole document -----	1,4
A	WO 01/23008 A (GIVAUDAN SA ; GOHIL KISHEN (GB); HART GERALD LESLIE (GB); NAISH GUY ED) 5 April 2001 (2001-04-05) page 4, line 22 - page 5, line 27; figures 6a,6b -----	1-4

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No.
PCT/CH2004/000527

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4995555	A	26-02-1991	NONE	
WO 9903514	A	28-01-1999	US 5875968 A AT 236662 T AU 8500698 A BR 9810908 A CA 2295652 A1 CN 1264311 T DE 69813238 D1 DE 69813238 T2 EP 1001817 A1 JP 2001510077 T NZ 502177 A WO 9903514 A1	02-03-1999 15-04-2003 10-02-1999 08-08-2000 28-01-1999 23-08-2000 15-05-2003 06-11-2003 24-05-2000 31-07-2001 29-06-2001 28-01-1999
EP 0094499	A	23-11-1983	DE 3218480 C1 DE 3218481 C1 DE 8214314 U1 AT 20636 T AU 554823 B2 AU 1452783 A CA 1233743 A1 DE 3364412 D1 EP 0094499 A1 ES 272038 Y JP 58212737 A US 4526320 A DE 3300088 A1	01-06-1983 19-01-1984 02-09-1982 15-07-1986 04-09-1986 17-11-1983 08-03-1988 14-08-1986 23-11-1983 16-06-1984 10-12-1983 02-07-1985 17-11-1983
GB 2014854	A	05-09-1979	DE 2807424 B1 FR 2417940 A1 US 4247042 A	06-09-1979 21-09-1979 27-01-1981
US 4768676	A	06-09-1988	JP 5032125 Y2 JP 63180047 U JP 63094174 U	18-08-1993 21-11-1988 17-06-1988
WO 0123008	A	05-04-2001	EP 1088562 A1 AT 242014 T AU 748785 B2 AU 5355500 A AU 6699000 A BR 0004489 A CA 2321352 A1 CA 2339777 A1 DE 60003134 D1 DE 60003134 T2 WO 0123008 A1 EP 1088561 A1 EP 1133323 A1 JP 2001162156 A JP 2003510133 T SG 87165 A1 US 2004164181 A1 US 6708897 B1	04-04-2001 15-06-2003 13-06-2002 05-04-2001 30-04-2001 19-06-2001 29-03-2001 02-09-2002 10-07-2003 08-04-2004 05-04-2001 04-04-2001 19-09-2001 19-06-2001 18-03-2003 19-03-2002 26-08-2004 23-03-2004